


NT

Parâmetros Efetivos do Núcleo:

MODELO	$\Sigma I/A$ mm ⁻¹	Le mm	Ae mm ²	Ve mm ³
NT-45/19/16	0,46	89,1	195,6	17421,5
NT-45/28/15	0,897	110,4	123,1	13602
NT-45/28/17	8,818	110,47	135,04	14919
NT-45/28/20	0,69	110,47	160,07	17684
NT-45/28/30	0,445	110,47	248,2	27426
NT-52/32/20	0,647	126,9	196,12	24887,79
NT-45/28/30	0,445	110,47	248,2	27426
NT-52/32/20	0,647	126,9	196,12	24887,79
NT-52/32/24	0,544	126,9	233,33	29609,69
NT-60/21/10	0,59	106,5	178,0	18970,5
NT-60/21/20	0,299	106,5	356,07	37941,1
NT-60/21/25	0,24	106,55	443,26	47231,61

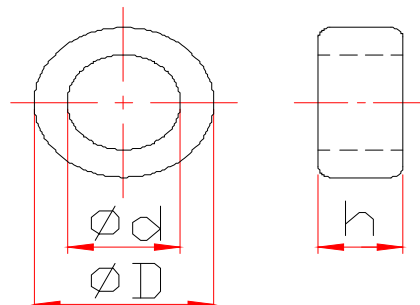

Dimensões em mm

	MAT.	Al [nH]	Tol. %	Ø D	Tol.	Ø d	Tol.	h	Tol.	PESO ~g
**NT-45/19/16-6000-IP12E	IP12E	6000	± 25	45,0	± 1,0	19,0	± 1,0	16,0	± 0,6	93,50
**NT-45/19/16-6000-IP12R	IP12R	6000	± 25	45,0	± 1,0	19,0	± 1,0	16,0	± 0,6	93,50
**NT-45/19/16-6000-IP6	IP6	6000	± 25	45,0	± 1,0	19,0	± 1,0	16,0	± 0,6	93,50
**NT-45/19/16-10900-TH50	TH50	10900	± 25	45,0	± 1,0	19,0	± 1,0	16,0	± 0,6	93,50
**NT-45/28/15-2400-IP12E	IP12E	2400	± 25	45,0	± 1,0	28,0	± 1,0	15,0	± 0,6	66,4
**NT-45/28/15-5500-TH50	TH50	5500	± 25	45,0	± 1,0	28,0	± 1,0	15,0	± 0,6	66,4
**NT-45/28/17-2800-IP12E	IP12E	2800	± 25	45,0	± 1,0	28,0	± 1,0	17,0	± 0,6	75,2
**NT-45/28/20-3250-IP12E	IP12E	3250	± 25	45,0	± 1,0	28,0	± 1,0	20,0	± 0,6	88,5
**NT-45/28/30-6000-IP12E	IP12E	6000	± 25	45,0	± 1,0	28,0	± 1,0	30,0	± 0,6	132,8
**NT-52/32/20-3700-IP12E	IP12E	3700	± 25	52,0	± 1,0	32,0	± 1,0	20,0	± 0,48	121,50
**NT-52/32/20-4400-IP6	IP6	4400	± 25	52,0	± 1,0	32,0	± 1,0	20,0	± 0,48	121,50
**NT-52/32/20-4400-IP12E	IP12E	4400	± 25	52,0	± 1,0	32,0	± 1,0	20,0	± 0,48	121,50
**NT-52/32/20-7100-TH50	TH50	7100	± 25	52,0	± 1,0	32,0	± 1,0	20,0	± 0,48	121,50
**NT-52/32/24-4400-IP12E	IP12E	4400	± 25	52,0	± 1,0	32,0	± 1,0	24,0	± 0,48	145,80
**NT-60/21/10-3750-IP12E	IP12E	3750	± 25	60,0	± 2,5	21,0	± 1,0	10,0	± 0,4	107,00
**NT-60/21/10-3750-IP6	IP6	3750	± 25	60,0	± 2,5	21,0	± 1,0	10,0	± 0,4	107,00
**NT-60/21/10-4400-IP12R	IP12R	4400	± 25	60,0	± 2,5	21,0	± 1,0	10,0	± 0,4	107,00
**NT-60/21/20-7600-IP12E	IP12E	7600	± 25	60,0	± 2,5	21,0	± 1,0	20,0	+0,6/-0,4	231,00
**NT-60/21/20-7600-IP12R	IP12R	7600	± 25	60,0	± 2,5	21,0	± 1,0	20,0	+0,6/-0,4	231,00
**NT-60/21/20-7600-IP6	IP6	7600	± 25	60,0	± 2,5	21,0	± 1,0	20,0	+0,6/-0,4	231,00
**NT-60/21/25-9600-IP6	IP6	9600	± 25	60,0	± 2,5	21,0	± 1,0	20,0	+0,6/-0,4	288,00

Nota 1: ** Poderão ser fornecidos com ou sem pintura

Nota 2: Em caso de fornecimento com pintura, as cotas externas ficam com dimensões máximas ampliadas em 0,25mm, e cotas internas ficam com dimensões mínimas reduzidas em 0,25mm.

Outros Al's mediante consulta